

# SMART ELEVATOR PRO 300



**High-tech, wheeled staircase developed for curved and spiral staircases. without needing help to get in and out of your chair**

**It is the platform type stair lift model that you can use. interior and exterior**

**Suitable for indoor applications. After the platform is installed,**

**Once closed, the stairs are fully usable. Building It does not require any additional costs and has a loading capacity of 300 kg. horizontal type The platform elevator brings functionality to the family environment with its first-class design. and adds elegance. Soft colors, round shapes, foldable security**

**Bars, minimal obstacles, platform type stair lifts meet your expectations. meets.**

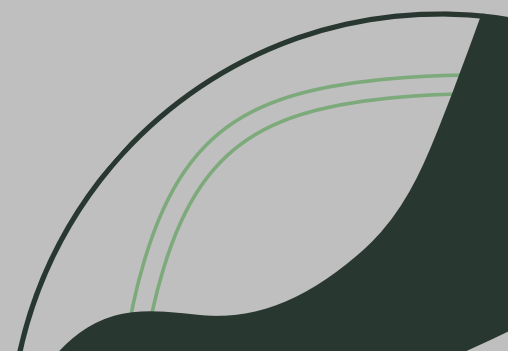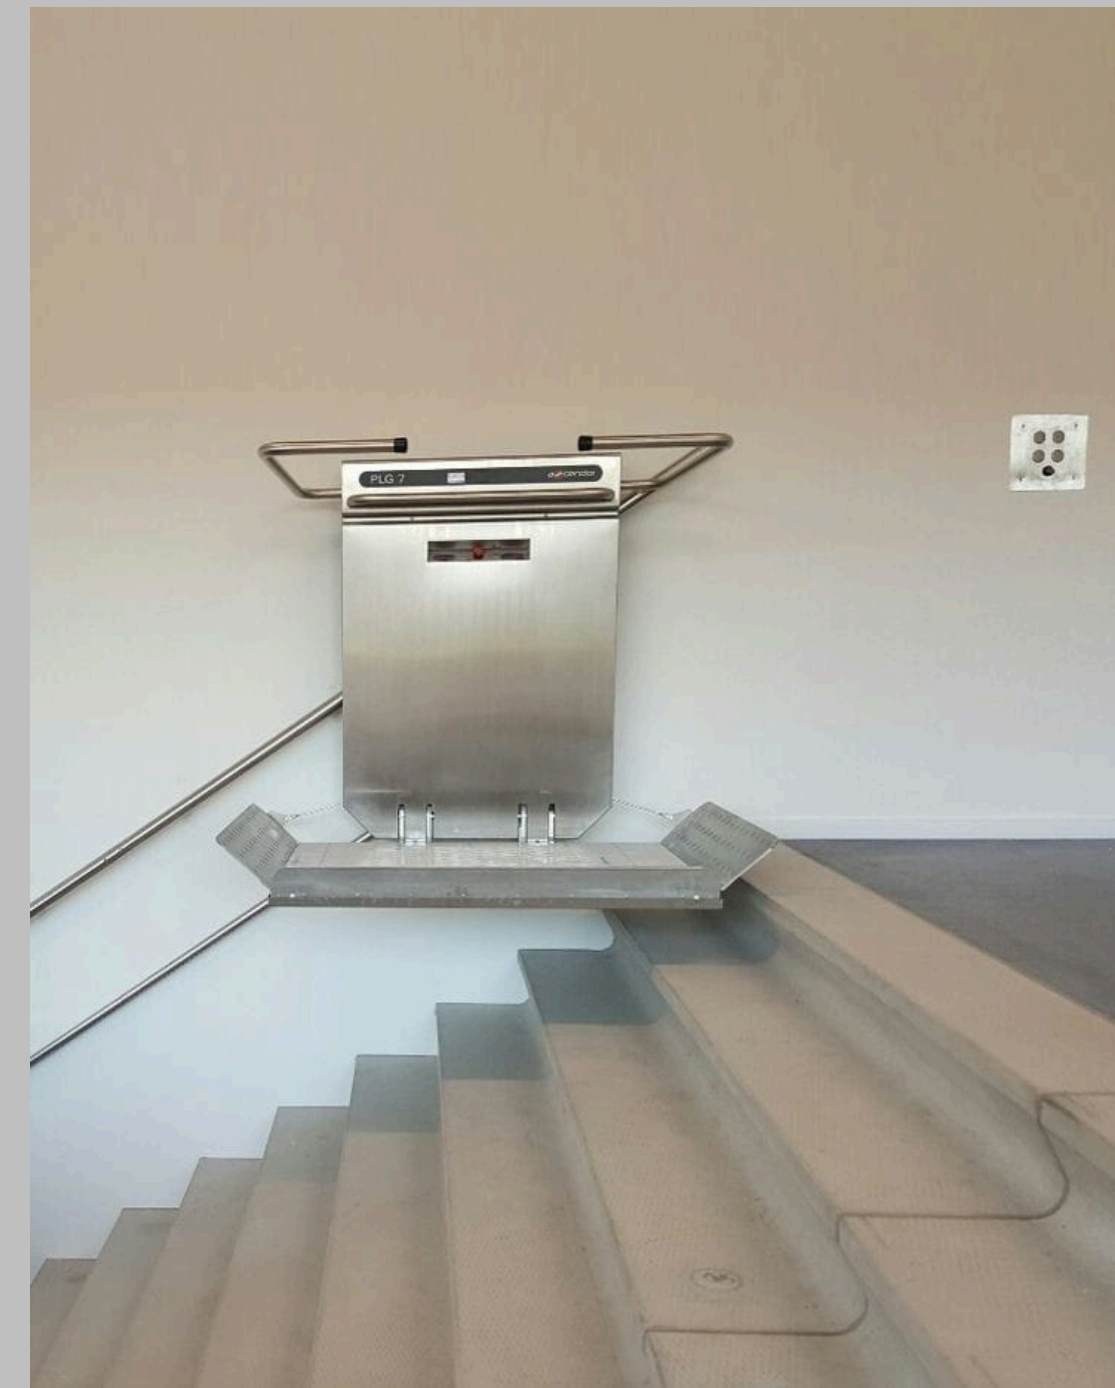

**The design specific for curved and revolving stairs that adds functionality and elegance with its strong and modern structure**

**Advanced technology developed for curved and spiral staircases; It is a stairlift model that helps you get in and out of your wheelchair without getting help from anyone . It is suitable for indoor and outdoor use. It does not require any expense. It has a loading capacity of 300 kg. It is a curved type platform lift with its first class design, which is suitable for family environment. It adds functionality and elegance. With its soft colors, round shapes, foldable safety bars, it meets your expectations**



## Technical specifications

<b>Application</b>	<b>It can be applied indoors and outdoors with variable slope or curved staircase.</b>	<b>Safety</b>	<b>Speed limiter, constant pressure commands, anti-crush and antiimpact on smart elevator, anti-jamming safety arrangement</b>
<b>Carrying Capacity</b>	<b>300 Kg</b>		<b>double electrical circuit protection; emergency stop button; locking</b>
<b>Speed</b>	<b>0,07 m/s standard speed 0,13 m/s faster speed and smooth drive (optional)</b>		<b>Rail Connection</b>
<b>Stair Width</b>	<b>1500 mm</b>		
<b>Type</b>	<b>Automatic opening and closing platform, with protection arms and access ramps</b>	<b>Dimensions (mm) (LxP)</b>	<b>With dimensions starting from 650 x 860</b>
<b>Floor Controls</b>	<b>Up / Down command by pressing continuously with ergonomic key</b>	<b>smart elevator Structure</b>	<b>Galvanized steel and aluminum with PVC coated</b>
<b>smart elevator Controls</b>	<b>Ergonomic hard-pressed command key; Emergency stop button; Locking</b>	<b>Optional</b>	<b>Remote control, anti-power system, folding eat</b>
<b>Rail</b>	<b>Consists of RAL 9006 epoxy painted double aluminum profile</b>	<b>Standard</b>	<b>Machine router 2006/42/EC , EN81-40:2009</b>
		<b>Power</b>	<b>230V, single phase, 50HZ , 16A</b>